

C+L-Band ASE Broadband Light Source



Product Description:

The VENUS series C+L band ASE light source of Connet employs the optimized Er-doped fiber laser to realize output laser with wide spectrum, high output power and extremely high stability output power within the whole operating temperature range. The C+L-band ASE sources of Connet have the extremely high spectral flatness which is less than 3.5dB.

The VENUS series C+L band ASE light sources of Connet are the highly integrated systems. The benchtop source uses the high-definition LCD which can display the current and the voltage synchronously and the output power also can be continuously tunable. They are suitable for scientific research and manufacture testing. In addition, Connet also can provide the compact module package for system integration.

Applications:

- Components test
- Optical fiber sensing system
- Spectrum analysis
- Optical fiber gyroscope
- Fiber communication

Features:

- High output power: up to 200mW
- High stability and high reliability
- Wide bandwidth: C+L band
- Excellent flatness: <3.5dB
- Low ripple


Specifications:

Parameter	Unit	Specification		
		Min	Typ.	Max
Part no.		VASS-CL-B: SM VASP-CL-B: PM		
Output Power ¹	mW	10	-	200
Operating Wavelength	nm	1528	-	1602
Spectral Width (FWHM)	nm	-	74	-
Spectral Flatness(Standard)	dB	-	6	7
Spectral Flatness(Flattened)	dB	-	2.5	3.5
Output Isolation	dB	30	35	-
Stability of Output Power (15min) ²	%	-	±0.5	±1.0
Stability of Output Power (8h) ²	%	-	±2.0	±5.0
Output Power Adjustment Range	%	0	-	100
Output Power Adjustment Mode		Coarse / Fine		
Output Fiber Type (Single mode)		SMF 9/125um NA=0.13		
Output Fiber Type (PM)		PM1550 NA=0.13		
Polarization Extinction Ratio (PER)	dB	> 17 (PM output fiber)		
Output Fiber Length	m	> 1		
Output Fiber Connector		FC/APC (other options available)		
Operating Voltage	VAC	100-240		
Power Consumption ³	W	-	-	20
Operating Temperature	°C	0	-	+50
Storage Temperature	°C	-40	-	+85
Dimension	mm	340(L)×240(W)×100(H)		

Specifications:

- Output power is optional, typical output power :10mW、20mW、50mW、100mW、200mW;
- The output power stability is measured under 25°C, after 30 minutes' warm-up;
- The max power consumption is tested under the extreme temperature conditions.

Spectrum:

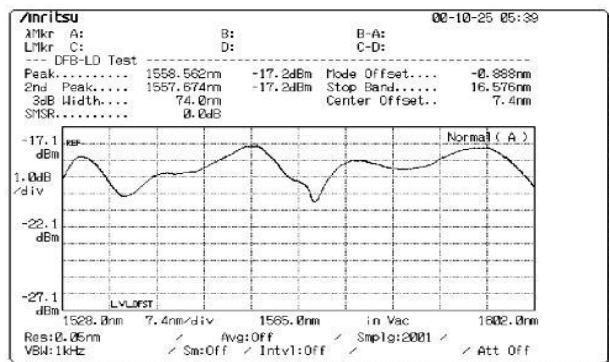

Ordering information:

- VASS-CL-P-<PW><FL>:SM
- VASP-CL-P-<PW><FL>:PM
- P: Package ,B-benchtop, M-module
- PW: Output power in mW. Example: 10-10mW, 50-50mW
- FL: Spectral flatness, 0-Standard, 1- Flattened